



Bewegungs- und Tageslichtsensor mit CASAMBI-Lichtsteuerung frei positionierbar

Motion and daylight sensor with CASAMBI lighting control freely placeable

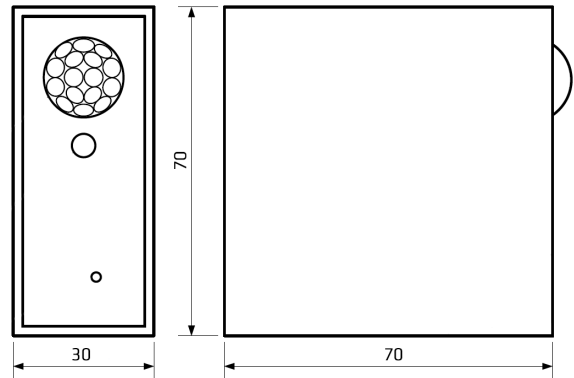

*Bemaßung für 808714 ist abweichend, siehe Tabelle.

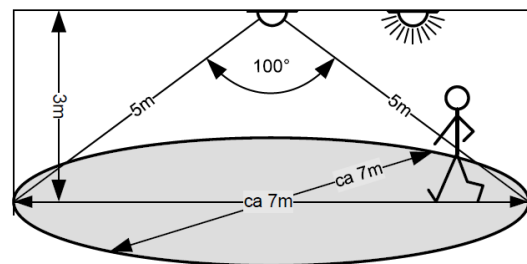

CASAMBI
READY

		weiß white	alu-elox. alu-elox.	schwarz black	nuss dunkel nut dark
Artikelnummer	Part no.	808710	808711	808712	808714
Typ	Type	SCMLBTBAW	SCMLBTBAAL	SCMLBTBAB	SCMLBTBAHN
Batterie	Battery	Batterie 2 x AA			
Funksignal	Radio signal	2,4..2,483 GHz, 8 dBm			
Umgebungstemperatur (ta)	Ambient temperature (ta)	-20..+50 °C			
Schutzgrad IP	Degree of protection IP	IP20			
Abmessungen	Dimensions	70 x 70 x 30 mm	70 x 70 x 30 mm	70 x 70 x 30 mm	74 x 74 x 34 mm

- Batteriebetriebener Sensor für Bewegung (PIR) und Tageslicht zum komfortablen Bedienen mit Smart-Geräten und Steuerung von Geräten in CASAMBI-Netzwerken
- Mit der CASAMBI-App konfigurierbar und vielseitig nutzbar
- Messbereich 3m, Winkel max. 100° (horizontal), 64 Detektionszonen
- Mit Lichtsensor für Dämmerungseinstellungen
- Nur für Evolution-Netzwerke geeignet!
- Funkreichweite innen bis 30 m, außen bis 50 m

- Battery-powered motion (PIR) and daylight sensor for convenient operation with smart devices and control of devices in CASAMBI networks
- Configurable with the CASAMBI app and usable in many ways
- Measuring range 3m, angle max. 100° (horizontal), 64 detection zones
- With light sensor for twilight settings
- Only suitable for Evolution networks!
- Radio range indoor up to 30 m, outdoor up to 50 m